

Installation and Operation Manual for Amore di Mare Floor Standing Toilet

Dear Customers,

Thank you for choosing Amore di Mare sanitary ware.

The toilet is manufactured using modern technologies, including pressure casting, automated glazing with robotic spraying systems, and firing in state-of-the-art fully automated kilns. The Manufacturer reserves the right to make changes to the product specifications and configuration without prior notice to the seller or the consumer, while maintaining the stated warranty period.

Product Purpose

The toilet is intended for installation in sanitary facilities of various types of buildings and is designed for sanitary and hygienic use.

Before Installation

Please carefully read and strictly follow this manual in order to avoid personal injury and damage to property. Before installation, the toilet must be stored in its original undamaged factory packaging in a dry and well-ventilated area at a distance of at least 1 meter from heating appliances and protected from direct sunlight.

If the factory packaging is opened in advance, all toilet components must be securely repacked using alternative packaging materials in such a way as to prevent contamination or damage. It is strictly prohibited to place any objects on the toilet, including on the packaged product. The product is susceptible to mechanical damage.

Installation of the toilet must be carried out only by qualified plumbing specialists. Self-installation of the toilet and any independent repair works are strictly prohibited.

This manual, with regard to installation procedures, is intended for use by qualified plumbing specialists, and with regard to operation, for consumers using products by Amore di Mare.

A certain amount of physical effort is required to tighten the fastening elements. However, excessive force may damage the toilet seat with lid or the toilet itself, and may also cause injury to your health or damage to your property. Please exercise extreme caution and care when tightening the fastening elements of the toilet.

Before installation, check that the supplied product is complete. Remove all components from the packaging and store them in one place to prevent their loss.

Installation Instructions and Package

If technical regulatory legal acts governing sanitary installation works for toilets, as well as preparatory (pre-installation) works, are in force in the country, the installation of the toilet and the performance of all preparatory works shall be carried out in accordance with both this manual and the relevant provisions of such regulatory legal acts.

Before starting the installation of the toilet, all construction works in the sanitary room must be fully completed. It is also necessary to ensure that all preparatory (pre-installation) works have been properly and fully carried out, including surface leveling, water supply connection, operability of the drainage system, etc.

If any protective films or other packaging elements are present, remove them from the product before installation. When performing toilet installation works, all standard safety precautions normally observed during plumbing and mechanical assembly works must be followed.


The water supply system must be connected through filters that prevent mechanical impurities from entering the product with the water. To ensure reliable pressure reduction in the water supply system (in order to prevent any damage caused by pressure surges), a pressure reducing valve must be installed (not included in the scope of supply).

For hygienic purposes and to prevent moisture from penetrating under the ceramic, the use of sealant is recommended. Auxiliary materials (silicone, sealants, etc.) and installation tools are not included in the scope of supply and must be purchased separately.


Scope of Supply:

- toilet bowl;
- toilet seat with lid;
- floor fixing kit;
- warranty card;
- installation and operation manuals for the toilet, seat, and lid.


Required Tools:

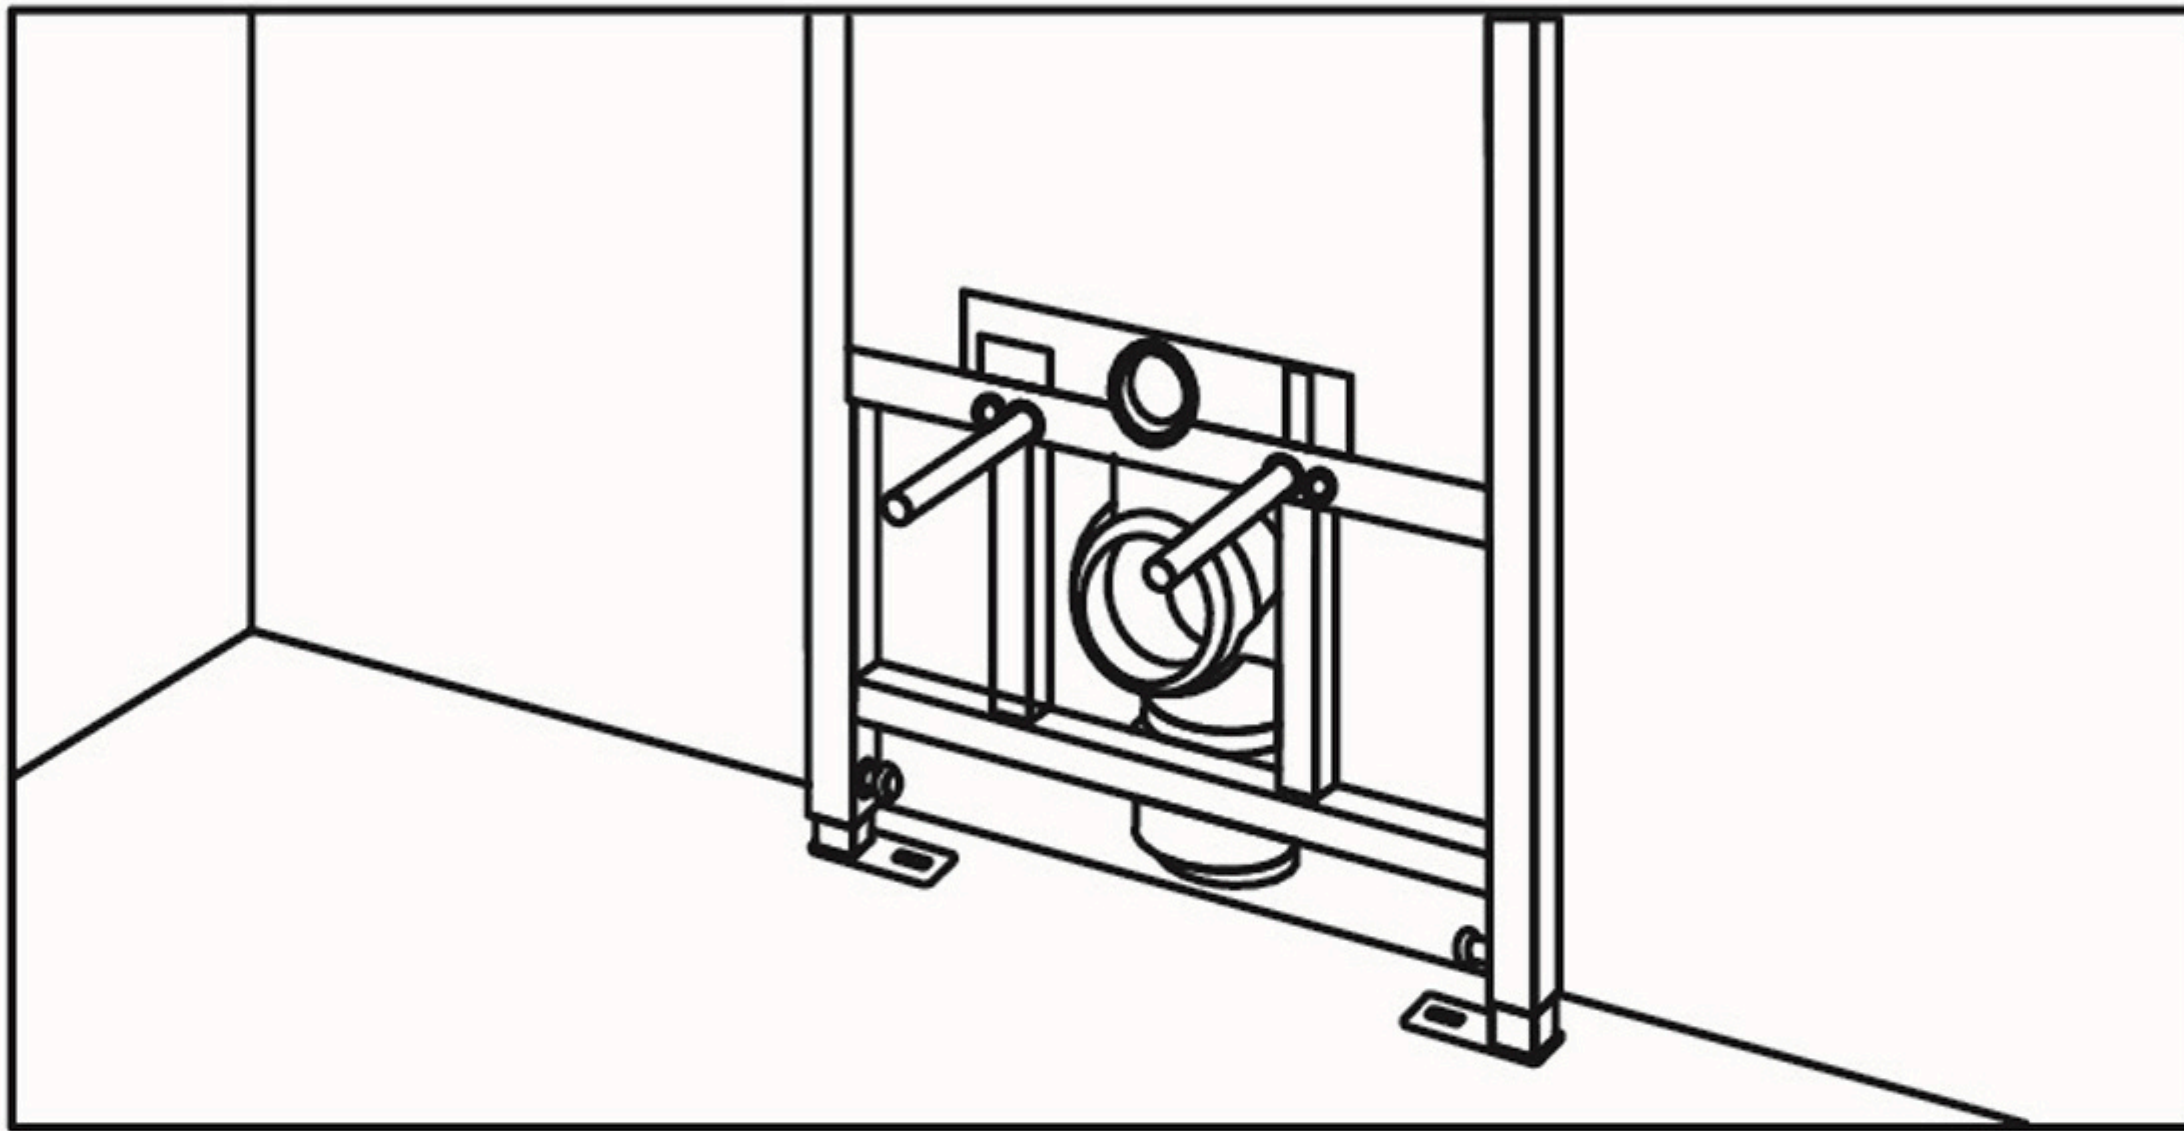

1. Install, secure, and adjust the water supply system (the concealed installation frame or concealed cistern) in accordance with the installation manual supplied with the water supply system. Securely fix the position of the outlet bend using metal fasteners.

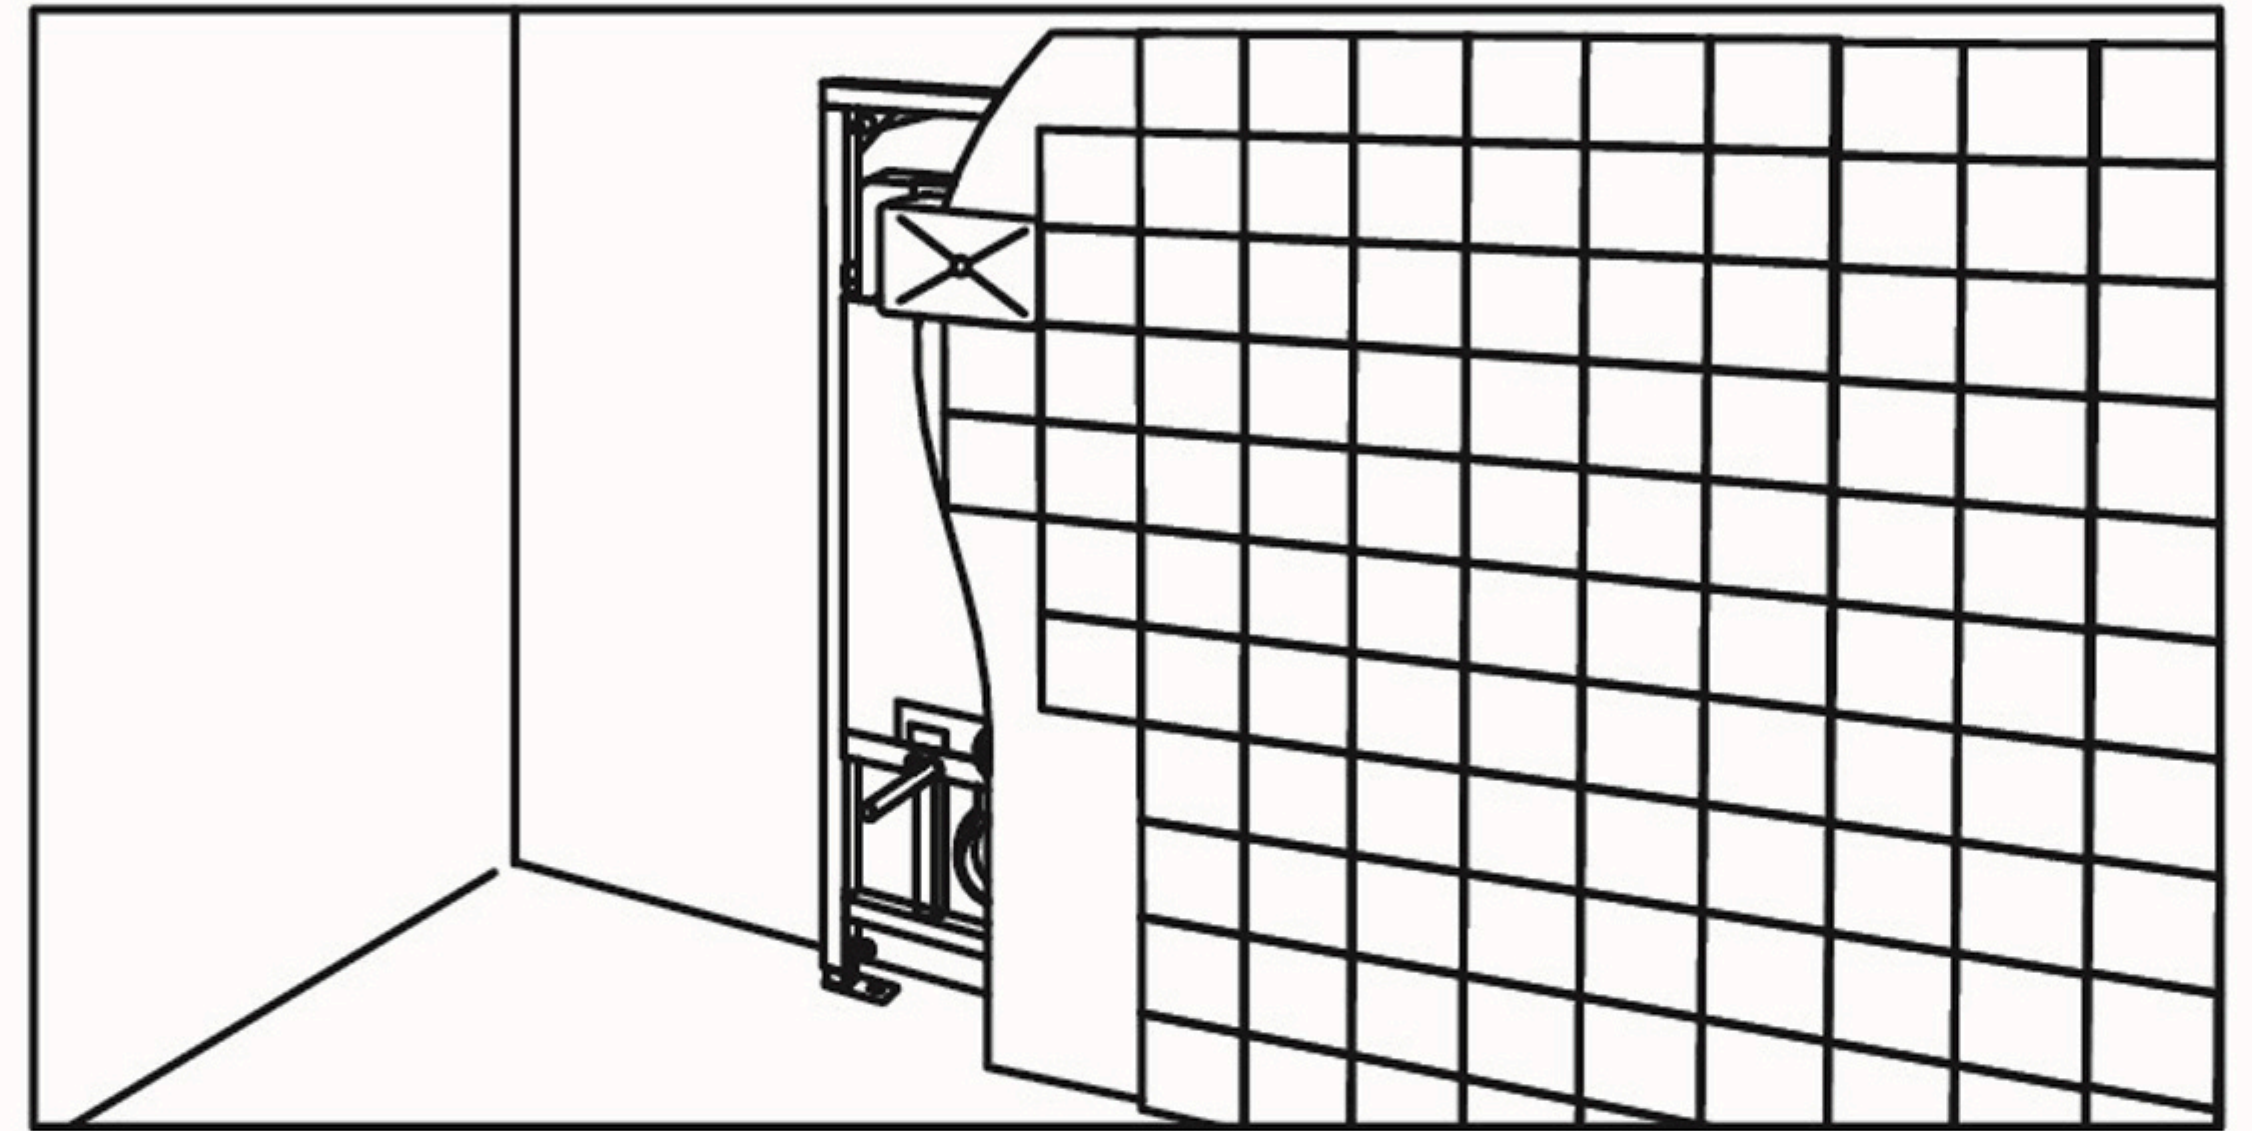


2. Finish (clad) the water supply system installation area in accordance with the tolerances and requirements specified by the manufacturer of the water supply system.

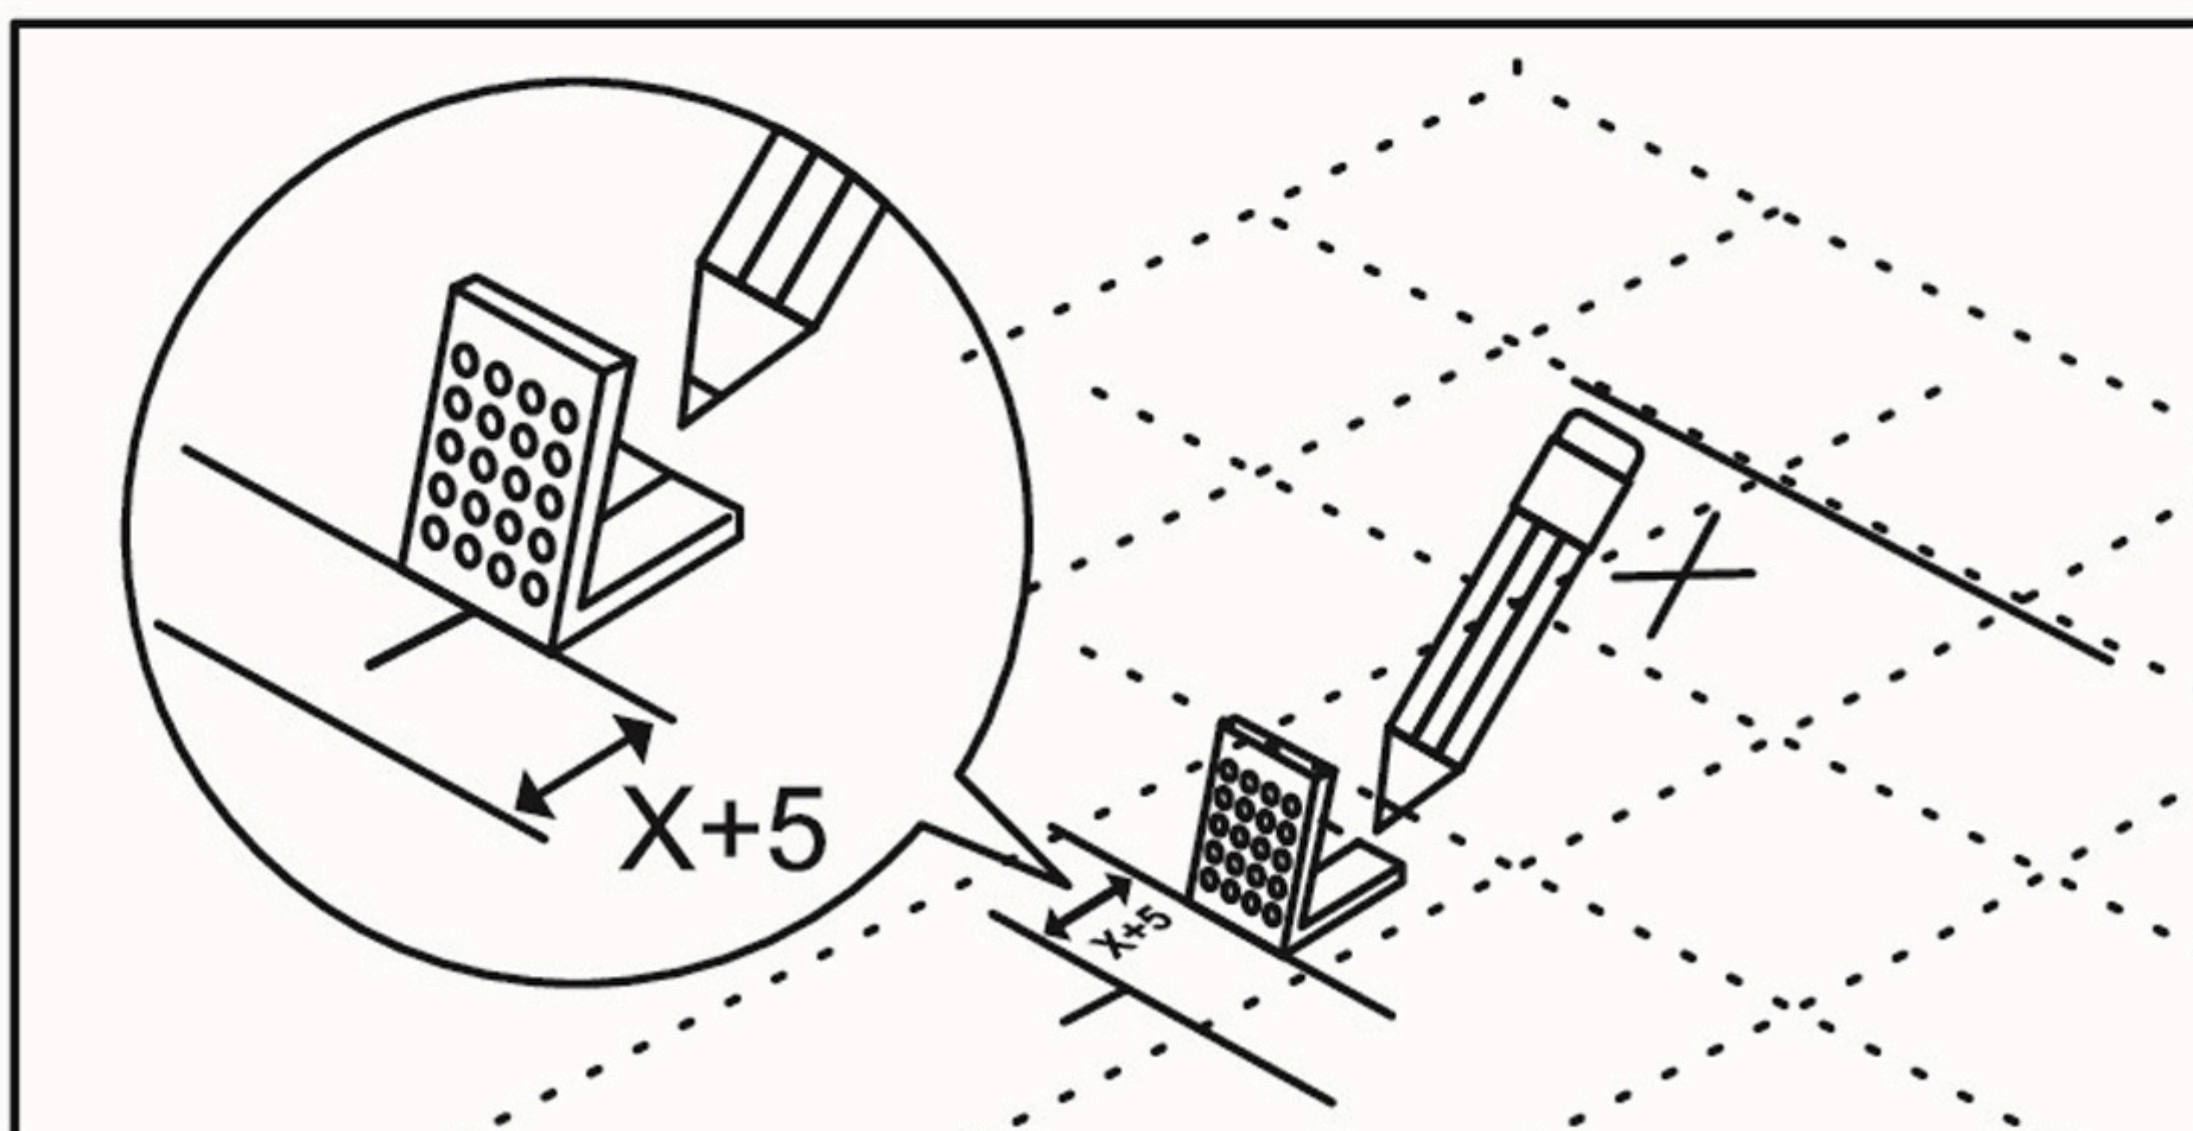

3. Apply technical grease to the sealing cuffs and the toilet outlet. Place the toilet in the pre-selected position on the floor. Trace the outline of the toilet and mark the positions of the mounting holes. Then remove the toilet and, along the marked contour, position the fixing brackets at a distance of $(x + 5 \text{ mm})$ from the contour, where x is the thickness of the ceramic.




4. Install the toilet along the marked contours, guiding the toilet outlet into the soil pipe. Fit the connecting sealing cuff onto the outlet of the water supply system.

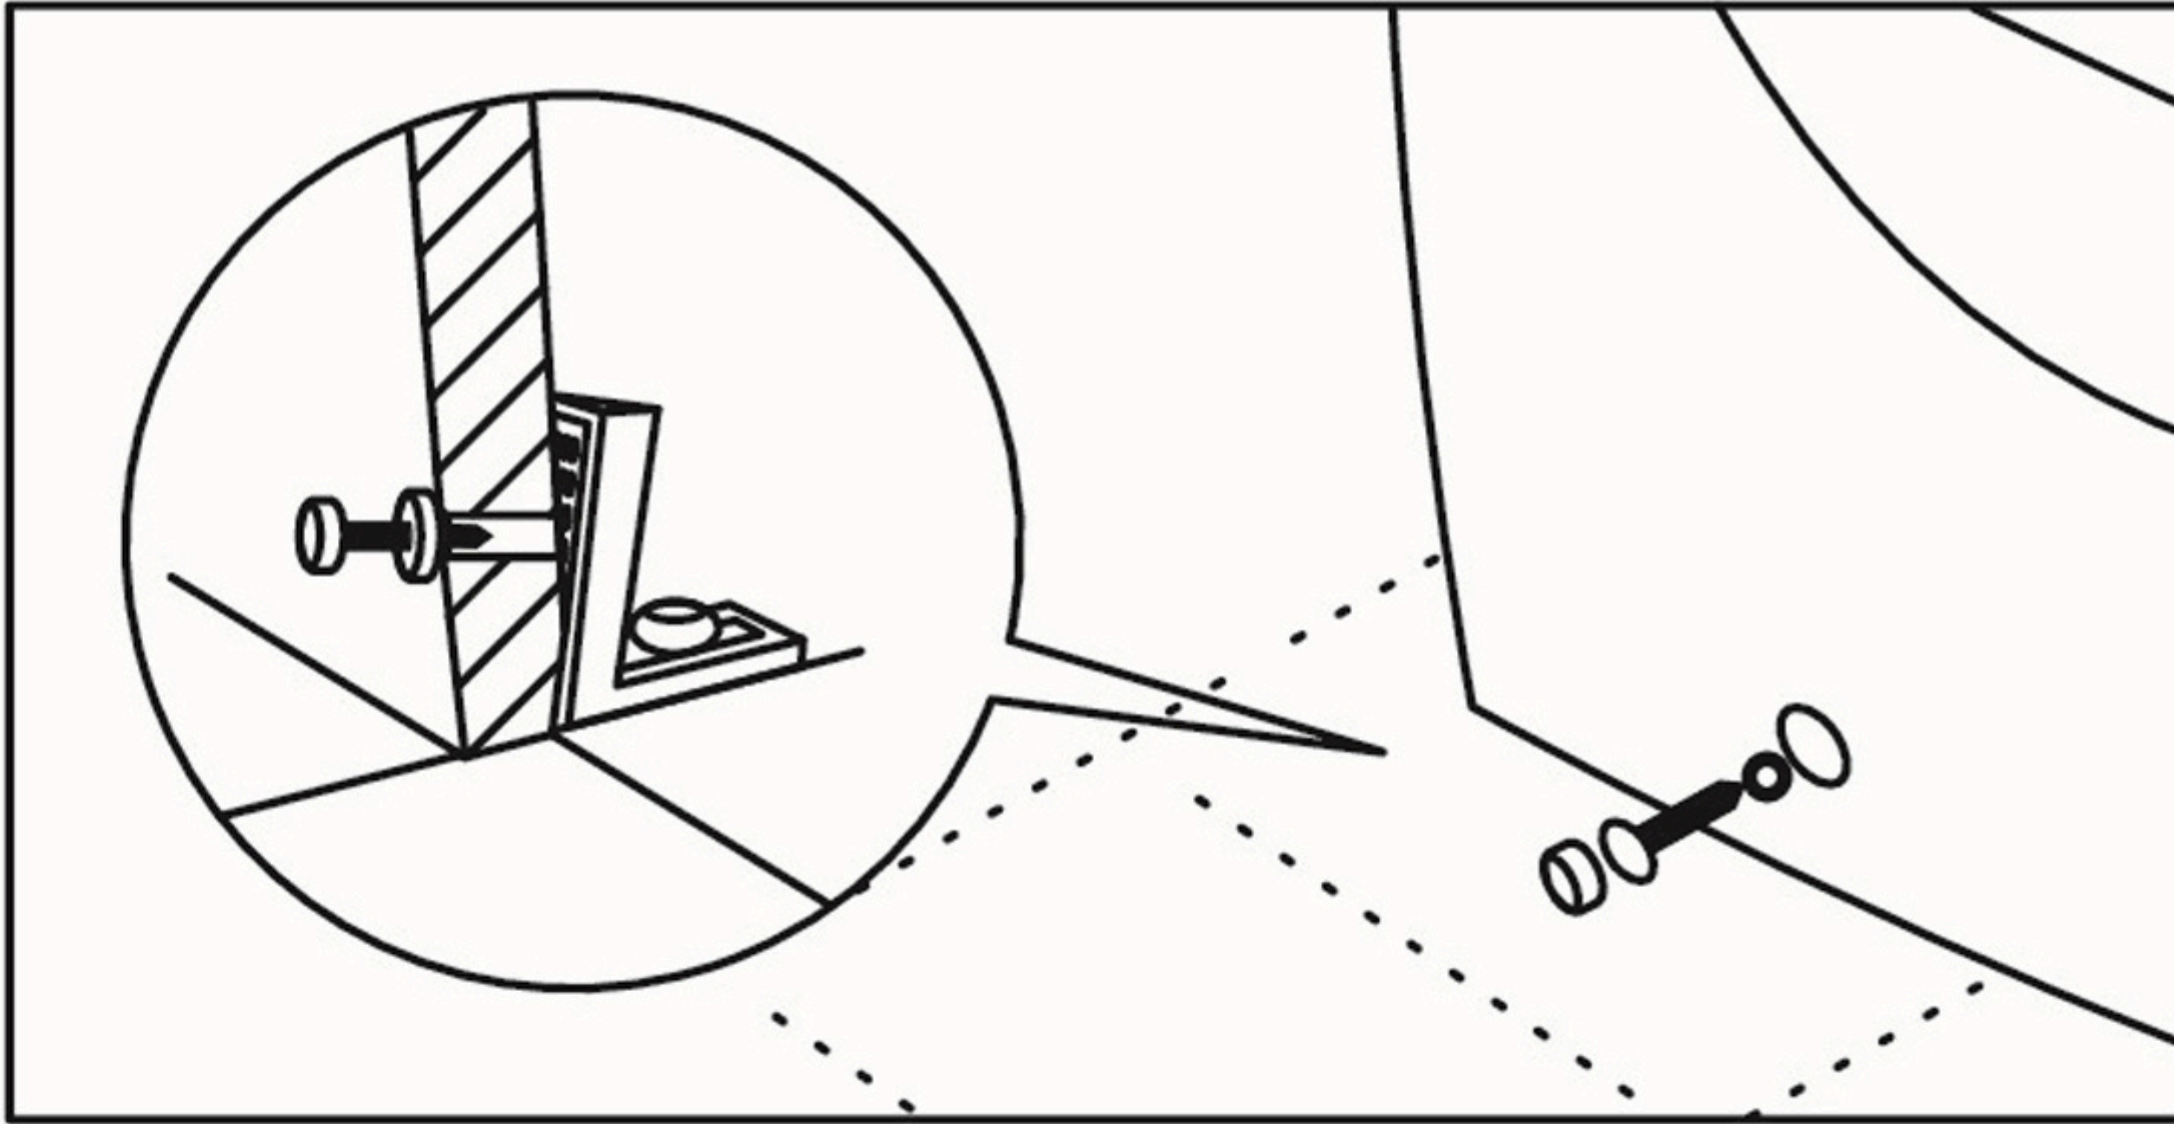

5. Insert the screws into the mounting holes and tighten them securely. Then fit the decorative caps onto the screw heads.

7. Install the toilet seat with lid on the toilet bowl in accordance with the assembly diagram supplied with the seat.

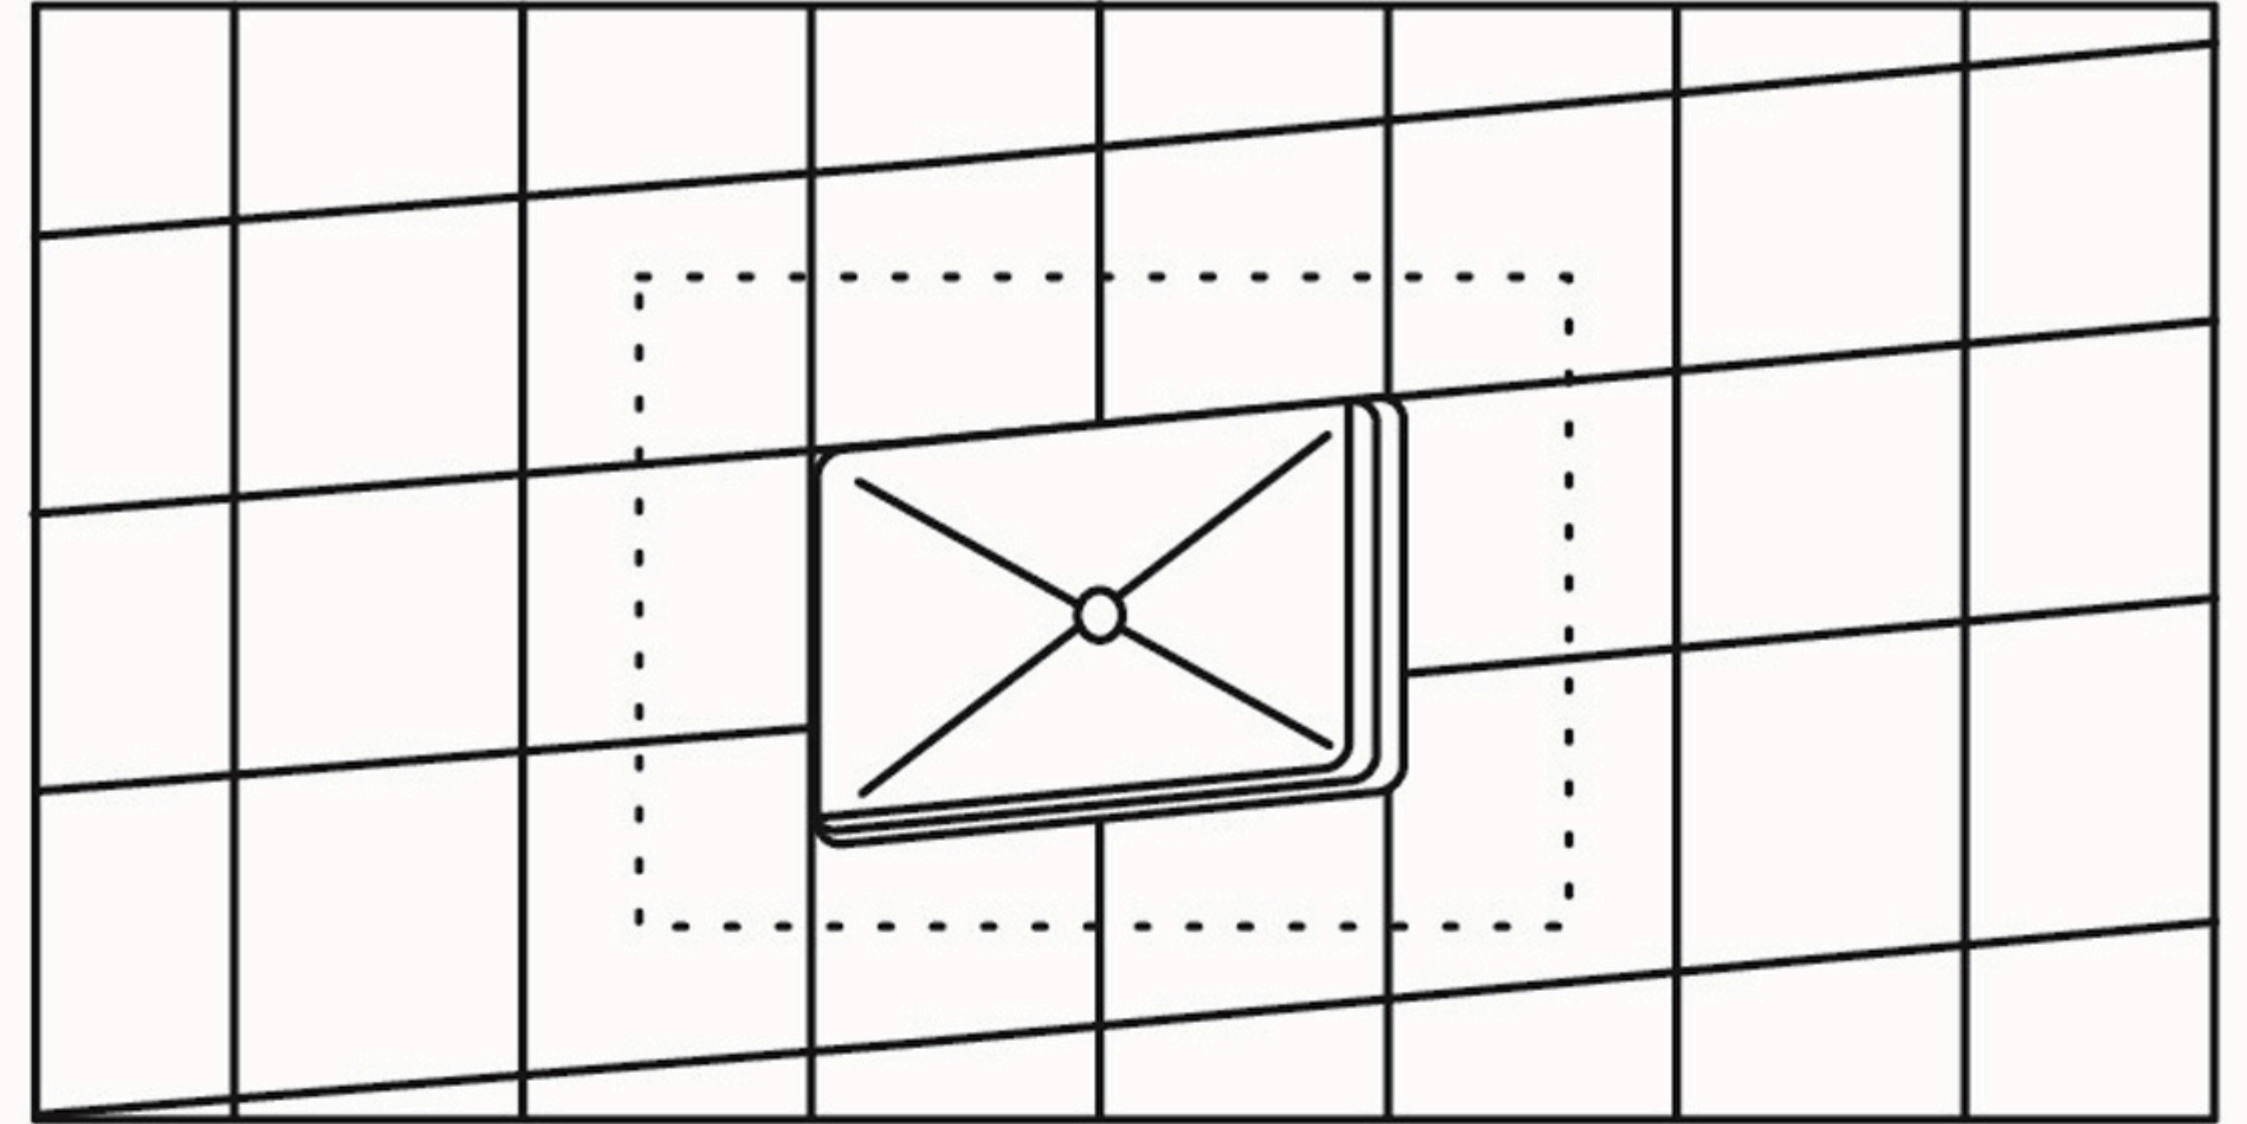

6. Install the flush button into the service opening and verify the correct operation of the water supply system.

8. The installation is complete.

Operating Rules

After completing the installation of the toilet, check the reliability of the fixing. When the product is installed correctly, proper rinsing of the toilet bowl is ensured. Before using the toilet, it is recommended to place a paper tissue or toilet paper on the surface of the water in the bowl. After use, stand up, lower the seat and lid, and activate the flush.

Use the toilet strictly for its intended purpose only.

It is strictly prohibited to:

- connect the water supply system to the hot water supply (cold water only);
- dispose of any garbage or household waste into the toilet;
- pour or flush cement or adhesive mixtures/solutions into the toilet;
- place or drop any objects on the toilet or on the seat and lid;
- stand with feet on the toilet and/or on the seat and lid;
- step on or abruptly sit down on the toilet and/or the seat and lid;
- allow the lid to strike the seat sharply, as well as the seat (lid) to strike the toilet bowl.

When disinfecting the toilet, keep the seat and lid in the open position until the cleaning agent has been completely flushed away. Do not allow any animals to come into contact with the toilet. Check the correctness and reliability of the installation of the toilet and the seat with lid annually. Do not allow prolonged exposure of the toilet or the seat with lid to direct sunlight.

Product Care Instructions

After each use of the toilet, wipe the product with a dry or slightly damp soft cloth (depending on the level of soiling). To prevent the appearance of «rust» (yellow) stains and spots, it is recommended to thoroughly wipe the ceramic surface with a soft cloth after each use.

When using the toilet, avoid using poor-quality water (hard water, water with mechanical impurities, etc.). Do not connect the product to a water supply system with parameters that do not comply with the requirements specified in this manual.

The glazed surface of the product is easy to clean. To clean the toilet surface, use warm soapy water only. Do not use abrasive, acidic, alkaline, or other aggressive cleaning agents, as well as organic or other solvents, as they may damage the glazed coating of the product. It is strictly prohibited to use hard brushes, wire brushes, or any other cleaning tools that may damage the surface of the product.

Toilet Repair

Mechanical damage to the toilet (including cracks, chips, etc.) is not subject to repair. Repair of the water supply and drainage systems may only be carried out by qualified plumbing specialists. It is strictly prohibited to clean the toilet drain opening using abrasive, acidic, alkaline, or other aggressive agents, organic or other solvents, as well as by mechanical methods that may damage the glazed surface of the product.

The use of a toilet with mechanical damage is strictly prohibited, as well as its use in the event of a malfunction of the water supply or drainage system. In case of a malfunction of the water supply system, the water supply must be immediately shut off before water enters the toilet bowl.

Transportation and Manual Handling of the Toilet

The toilet must be transported only in its original, undamaged factory packaging.

Transportation is permitted by any type of transport, provided that the cargo is protected from atmospheric precipitation and mechanical damage, in accordance with the cargo transportation regulations applicable to the respective mode of transport. The product must be securely fastened in the vehicle body to completely prevent any damage to the toilet during transportation.

When transported by road vehicle, the toilet, packed in its original undamaged factory packaging, must be placed exclusively on the floor of the vehicle. Transportation in two tiers (stacking) or placing any other items on top of the toilet packaging is strictly prohibited.

The toilet is a fragile product with significant weight and dimensions; therefore, manual handling must be carried out by at least two persons. Manual handling of the toilet by persons under 18 years of age, elderly persons, and persons with medical conditions that prohibit heavy lifting is strictly prohibited. It is recommended that only workers who have received the necessary occupational safety training for loading and unloading operations be involved in handling the toilet.

If the toilet is not to be installed immediately after being removed from the factory packaging, it must be placed for temporary storage on a dry, clean, and level surface, eliminating any possibility of mechanical damage to the product.

Warranty Terms and Conditions

The Manufacturer and the Seller guarantee the proper functioning of the toilet and its suitability for use in accordance with its intended purpose throughout the warranty period.

The warranty period for sanitary porcelain products (toilet) is specified by the Seller in the warranty card. The Manufacturer and the Seller shall not bear any warranty obligations (the warranty shall be void) in the event that defects are found to have arisen as a result of improper installation, unqualified repair, careless operation, or failure to comply with the rules for transportation, handling, operation, and maintenance of the toilet.

The warranty does not apply to wearing parts, including cartridges, plastic profiles, and drainage gaskets. The warranty also does not cover normal wear and tear resulting from regular use.

Reinstallation and Disposal

The toilet is designed for single installation only. Reinstallation and operation of a previously installed and dismantled toilet are strictly prohibited. Disposal of the toilet shall be carried out in accordance with the legislation of the country in which the toilet is installed.

Additional Information

Under normal installation and operating conditions, the toilet does not emit toxic substances into the environment and does not pose any health hazard to humans in direct contact. The toilet is not subject to mandatory certification.